


125mm Grommet Holed FG125-001

INTRODELTA^{LTD}

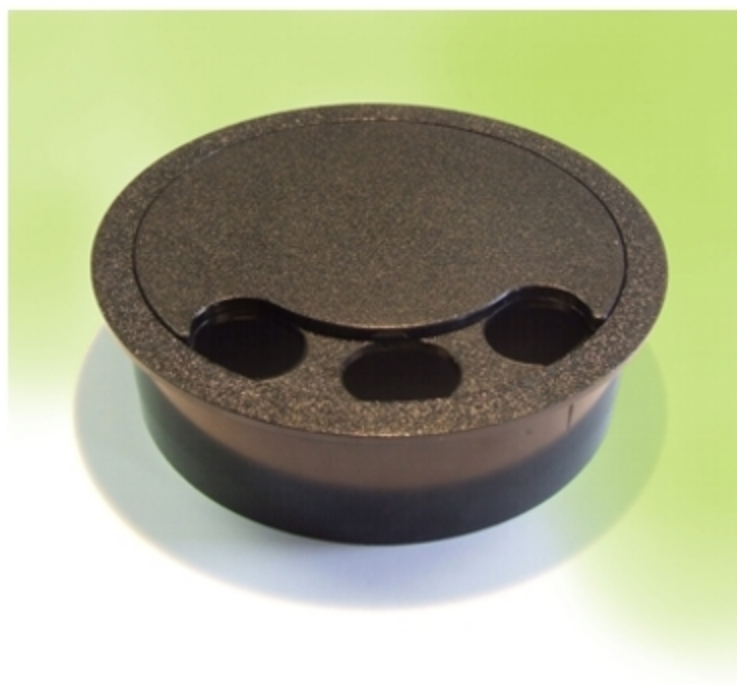

TECHNICAL SPECIFICATION:	125mm
Overall diameter of bezel:	140 mm
Fixing hole required:	127 mm
Flange depth below surface:	37 mm
Bezel thickness above surface:	3 mm
Inside diameter of flange:	111 mm
Max. cable diameter:	18 mm

Description

The grommet consists of an outer flange, which push-fits into a circular aperture provided in the raised floor. The outer flange will allow a hand to pass through it to access the floor void. The grommet has a top-assembly which is snapped into the outer flange. The top assembly has a cover which rotates to reveal three 20 mm holes. The cables or conduits are passed through the holes prior to the top assembly being inserted within the outer flange. The selection of only the appropriate number of holes promotes a clean and tidy appearance. *This grommet size is also available fitted with a 25mm slot, see specification FG125-002.*

COLOURS

Black, Grey or White.